SEAT MUST BE IN FORWARD 7 INCHES OF TRAVEL DURING TAKEOFF AND LANDING


SEAT MUST BE IN
FORWARD 7 INCHES OF TRAVEL
DURING TAKEOFF AND LANDING

FLOTATION CUSHION PULL TO REMOVE

FLOTATION CUSHION PULL TO REMOVE

BACK REST MUST BE IN NORMAL FLGHT POSITION WHEN SEAT IS MOVING OUTBOARD

BACK REST MUST BE IN
NORMAL FLGHT POSITION WHEN
SEAT IS MOVING OUTBOARD

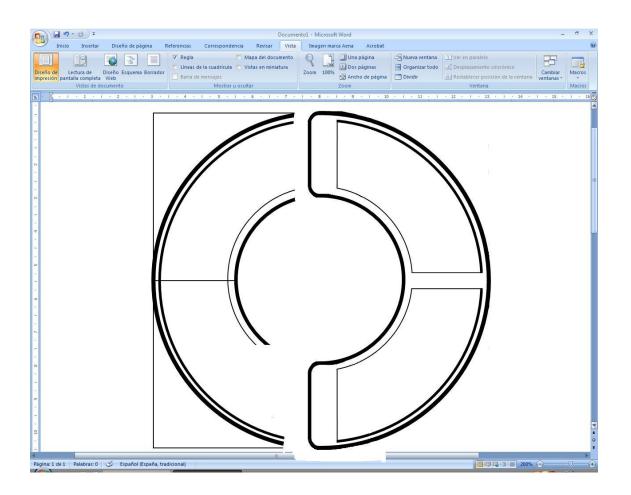

QUALIFIED FOR EXT.

OVERWATER OPERATIONS

QUALIFIED FOR EXT. OVERWATER OPERATIONS

QUALIFIED FOR EXT. OVERWATER OPERATIONS

EC-ALZ222

DON NOT EXTEND SPPEDBRAKE LEVER BEYOND THE FLIGHT DETENT IN FLIGHT

DON NOT EXTEND SPPEDBRAKE LEVER BEYOND THE FLIGHT DETENT IN FLIGHT